

BIKE TRAC PARKING SYSTEM

Model # 6003 Mounting Instructions



Mounting Bike Trac

Bike Trac can be mounted to any wall, corner, pillar, or post strong enough to hold the bikes. Use mounting holes as shown in illustration.

Note: To protect wheel, slide rubber sleeve onto wheel hook of Bike Trac.

Bike Trac Placement

Option 1: Stagger tops of the Bike Tracs (High, Low, High).



Approx. space between each 12-15".

Option 2: Level tops of Bike Tracs, hanging every other bike by rear tire. Approx. space between each 15-18".

Option 3: Level tops of Bike Tracs, hanging all bikes by front tire.

Approx. space between each 18-21".

Note: Be sure to leave enough room between each Bike Trac so that the bike's handlebars do not interfere with each other. Optimum distance between Tracs will depend on make and model of bike.

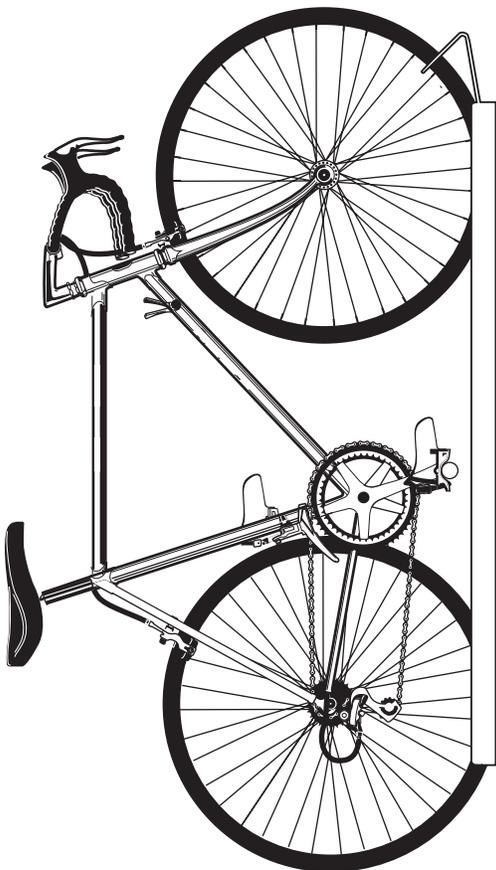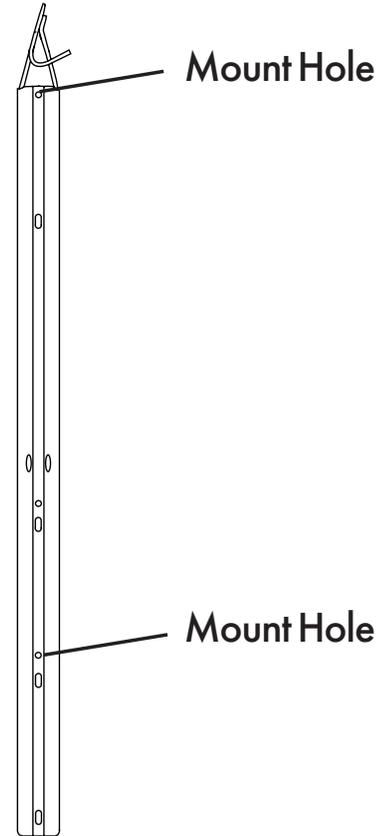

Warranty

We warrant this product to the first consumer to be free from defect in material and workmanship for a period of one year from date of purchase. (Please retain your sales slip for your records.) Any product or part thereof found to be defective within that period will be replaced without charge provided that: (1) the product was not misused; (2) no alterations or modifications were made; (3) its failure resulted from a defect in material or workmanship and not from normal wear expected in the use of the product; (4) the product or part is delivered, freight prepaid, to Graber Products. Manufactures only obligation shall be to replace such products or parts proved to be defective.

Parts List

| Part# | Qty | Description |
|-------|-----|--------------------------|
| 17105 | 1 | Bike Trac Assembly |
| 17371 | 1 | Wheel Hook Rubber Sleeve |

Saris Cycling Group, Inc.
5253 Verona Road Madison, WI 53711
(800) 783-7257 www.saris.com

#12131E 10/19